


NIMH - TECHNICAL DATA SHEET - MODEL ESP1100AFH

Battery General Specification :

Model - ESP1100AFH
Chemical Material - Nickel Metal Hydride.
Description - 1.2v Rechargeable battery
2/3AF size.

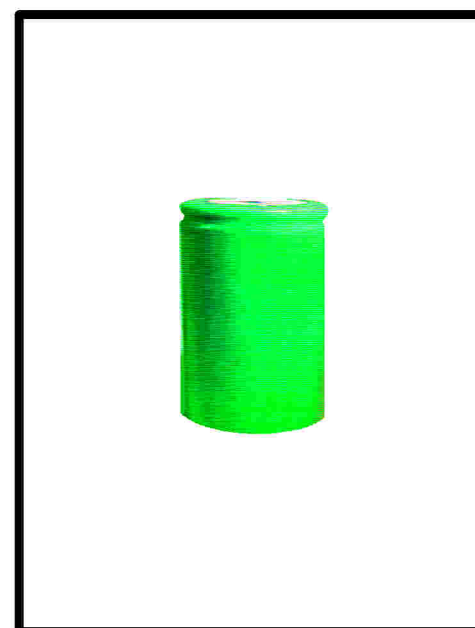

Discharging:

(A) Discharge current.

- 1/ Discharged at 0.2CA, Provide 80% at EPV 1.2V 98% of nominal capacity at EPV 1.1V.
- 2/ Discharged at 0.5CA, Provide 70% at EPV 1.2V 95% of nominal capacity at EPV 1.1V.
- 3/ Discharged at 1CA, Provide 60% at EPV 1.2V 93% of nominal capacity at EPV 1.1V.
- 4/ Discharged continuously at 1C, for 2 hours, No explosion or leakage.


(B) Capacity and Cycle (500 to 800 cycles)

Charge at 0.1C, discharge at 0.2C; 100% nominal capacity.

Charge at 1C, discharge at 1C; minimum 95% nominal capacity.

Physical and Electrical Specifications.

DIMENSIONS WITH SLEEVE

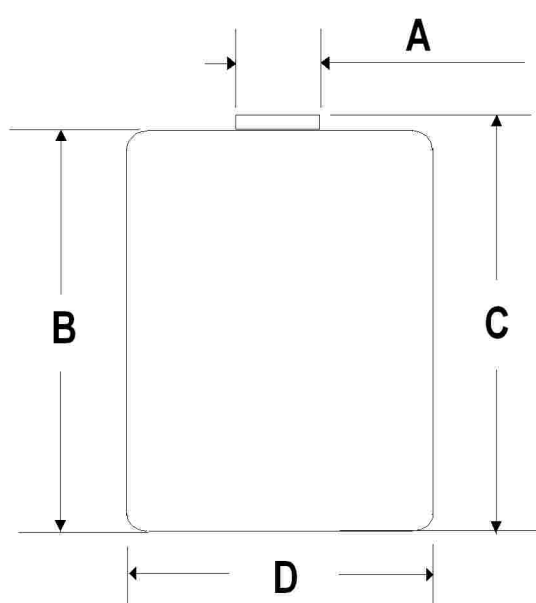

A 08.0mm +/- 0.2mm

B

C 28.5mm +/- 0.5mm

D 16.8mm +/- 0.2mm

Nominal Voltage		1.2v	
Typical Capacity		1100mAh	
Weight		20g	
Internal resistance.		26m Ω	
Charge	Standard		110mA x 15hrs
	Quick		330mA x 5hrs
Discharge	110mA (0.1C)		64min (0.1C)
	220mA (0.2C)		60min (0.2C)
	1100mA (1C)		55min (1C)
Ambient temperature	Charge	Standard	0 ⁰ to 45 ⁰ C
		Quick	0 ⁰ to 40 ⁰ C
	Discharge		-20 ⁰ to 65 ⁰ C
	Storage		-20 ⁰ to 45 ⁰ C

Discharge Temperature at 0.2CA

- 1/ At 20⁰C, 100% nominal capacity.
- 2/ At 0⁰C, 90% nominal capacity.
- 3/ At 60⁰C, Or -20⁰C, 85% nominal capacity.
- 4/ Charge retention for 30 days at 20⁰C, cell can provide 70% nominal capacity discharged at 0.2CA.

CELLS MANUFACTURED TO GB/T19001:2000 - ISO9000/9001: 2000 STANDARD & CONFORMITY
Cell & Battery specifications are subject to modifications without prior notice. All the above information is generally descriptive and is not intended as a guarantee or warranty.