
Li-ion Cylindrical Battery Specification

MODEL INR18350NP

Nominal capacity 1400mAh

Content


1. MODIFIED LIST	3
2 .Scope	4
3. Initial Dimension	4
4.Specification	5
5 General Performance	6
6 Environment Performance	6
7 Safe Characteristic	7
8. CAUTIONS IN USE	8
9. Battery operation instruction	8
10. Period of Warranty	9
11. Other The Chemical Reaction	9
12. Note:	10

2 .Scope

This specification describes the basic performance, technical requirement, testing method, warning and caution of the Li- ion Cylindrical rechargeable battery .The specification only applies to Shen zhen Fest Technology Co. , Ltd.

3. Products assembly drawing and size refers to picture

(PVC)

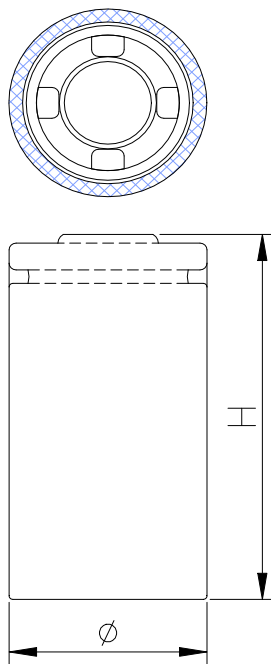

NO.	Item	Specifications
1	Diameter	18.7-0.5mm (PVC)
2	Height H	35.2-0.6mm

4.Specification

NO.	Item	Specifications
4.1	Typical Capacity	1400mAh @ 0.2C Discharge (0.2C)
	Minimum capacity	1380mAh @ 0.2C Discharge (0.2C)
4.2	Nominal voltage	3.70V
4.3	Standard Charge	CC/CV,0.2C5A, 4.20V
4.4	Standard Discharge	CC,0.2C5A, 2.75V
4.5	End-of-charge Voltage	4.20V
4.6	End-of-charge Current	0.02C5A (At CV mode)
4.7	End-of-discharge Voltage	2.75 V
4.8	Charging Time	8.0hours (standard charge) 8
4.9	Quick Charge Current	1400mA (1.0C5rate) 1C
4.10	Quick Discharge Current	1400mA (1.0C5rate) 1C
4.11	Max Continuous discharge current	4200mA (3.0C5rate) 3C
4.12	Initial Impedance	Max:55mΩ
4.13	Weight	Approx: 24g ± 1g
4.14	Operating temperature	Charging(): 0°C~45°C Discharging(): -20°C~60°C
4.15	Storage temperature	-5°C~35°C
4.16	Storage Humidity	≤75% RH
4.17	Appearance	Without scratch, distortion, contamination and leakage ()
4.18	Standard environmental condition	Temperature() : 25±3°C Humidity : 45-75%RH Atmospheric Pressure : 86-106 KPA
4.19	Temperature Dependence of Discharge Capacity @ 0.2C Discharge (0.2C)	
Charge temperature		Discharge temperature
25°C		-20°C 0°C 15°C 25°C 40°C

Relative Capacity	70%	80%	90%	100%	100%
-------------------	-----	-----	-----	------	------

5 General Performance

No.	Item	Test Methods and Condition	Criteria
5.1	0.2C Capacity 0.2C	After standard charging, rest battery for 10min, then discharging at 0.2C to voltage 2.75V, recording the discharging time.	$\geq 300\text{min}$
5.2	Cycle Life	Constant current 1.0C charge to 4.2V, then constant voltage charge to current declines to 0.01C, rest 10min, constant current 1.0C discharge to 2.75V, rest 20 min. Repeat above steps till continuously discharging capacity Higher than 80% of the Initial Capacities of the Cells	≥ 300 times ()
5.3	Capability of keeping electricity	$25 \pm 3^\circ\text{C}$, After standard charging, rest the battery 28days, discharging at 0.2C to voltage 2.75V, recording the discharging time.	$\geq 240\text{min}$

6 Environment Performance

No.	Item	Test Methods and Condition	Criteria
6.1	Discharge at high temperature	After standard charging, rest the cells 4h at $60 \pm 2^\circ\text{C}$, then discharging at 1C to voltage 3.0V, recording the discharging time.	$\geq 54\text{min}$
6.2	Discharge at low temperature	After standard charging, rest the cells for 16h at $-20 \pm 2^\circ\text{C}$, then discharging at 0.2C to voltage 3.0V, recording the discharging time.	$\geq 210\text{min}$
6.3	Thermal shock	Put the cells in the oven. The temperature of the oven is to be raised at $5 \pm 2^\circ\text{C}$ per minute to a temperature of $130 \pm 2^\circ\text{C}$ and remains 30 minutes.	No fire or explosion

		130±2	
--	--	-------	--

7 Safe Characteristic

No.	Item	Test Methods and Condition	Criteria
7.1	Over charge testing	At 25 ± 3 °C , charging cells with constant current 2C to voltage 5.0V, Stop test till cells temperature 10°C lower than max temperature.	No fire or explosion ,
7.2	Forced discharge	At 25 ± 3 °C , discharge to the termination voltage according to the standard discharge requirements, and then reverse charge at 1C current for 90 minutes	No fire or explosion ,
7.3	Short-circuit testing	After being charged according to standard, place it in an environment of 25 ± 5 ° and 55 ± 5 °, and then connect the positive and negative extremes with a wire to ensure that all the external resistance is 80 ± 20 m Ω .The battery temperature drops to 20% lower than the peak value or the short circuit time reaches 24h.	No fire or explosion ,
7.4	Vibration test	Standard charged and fixed on the vibration table and subjected to vibration cycling that the frequency is to bevaried at the rate of 1Hz per minute between 10Hz and 55Hz, battery is to be subjected to simple harmonicmotion with an amplitude of 0.8 mm (0.03 in) [1.6mm(0.06 in) total maximum excursion]The cells shall be vibrated for 90 -100minutes per axis of X, Y axes.	No remarkable damage、 No smoking 、 No explosion
7.5	Free drop test	Each fully charged cell is dropped three times from a height of 1,0m onto aconcrete floor. The cells are dropped so as to obtain impacts in randomorientations.	No fire 、 No explosion
7.6	Altitude/Low Pressure simulation test	Standard charged and stored for 6 hours in an vacuum environment with pressure of less than 11.6kPa and temperature of 25 ± 3 °C.	no leakage, no fire, no explosion

※ Above testing of safe characteristic must be with protective equipment.()

8. CAUTIONS IN USE

To ensure proper use of the battery please read the manual carefully before using it. Handling

- Do not expose to, dispose of the battery in fire.
- Do not put the battery in a charger or equipment with wrong terminals connected.
- Avoid shorting the battery
- Avoid excessive physical shock or vibration.
- Do not disassemble or deform the battery.
- Do not immerse in water.
- Do not use the battery mixed with other different make, type, or model batteries.

-
- Keep out of the reach of children.
-

charge and discharge

- Battery must be charged in appropriate charger only.
-
- Never use a modified or damaged charger. ▪

Do not leave battery in charger over 24 hours.

-

. storage

- Store the battery in a cool, dry and well-ventilated area.

. disposal

- Regulations vary for different countries. Dispose of in accordance with local regulations.
-

9. Battery operation instruction

9.1 Charging

Charging current: Cannot surpass the biggest charging current which in this specification book stipulated。

Charging voltage: Does not have to surpass the highest amount which in this specification book stipulated to decide the voltage。

Charge temperature : The battery must carry on the charge in the ambient temperature scope which this specification book stipulated。

Uses the constant electric current and the constant voltage way charge, the prohibition reverse charges. If the battery positive electrode and the cathode meet instead, can damage the battery.

9.2 Discharging current

The discharging current does not have to surpass this specification book stipulation the biggest discharging current, the oversized electric current electric discharge can cause the battery capacity play to reduce and to cause the battery heat.

9.3 discharge temperature

The battery discharge must carry on in the ambient temperature scope which this specification book stipulated

9.4 Over-discharges

After the short time excessively discharges charges immediately cannot affect the use, but the long time excessively discharges can cause the battery the performance, battery function losing. The battery long-term has not used, has the possibility to be able to be at because of its automatic flashover characteristic certain excessively discharges the condition, for prevented excessively discharges the occurrence, the battery should maintain the certain electric quantity.

9.5 Storing the Batteries

The battery should store in the product specification book stipulation temperature range. If has surpasses above for six months the long time storage, suggested you should carry on additional charge to the battery.

10. Period of Warranty

The period of warranty is one year from the date of shipment. guarantees to give a replacement in case of cells with defects proven due to manufacturing process instead of the customers abuse and misuse.

1

11. Other The Chemical Reaction

Because batteries utilize a chemical reaction, battery performance will deteriorate over time even if stored for a long period of time without being used. In addition, if the various usage conditions such as charge, discharge, ambient temperature, etc. are not maintained within the specified ranges the life expectancy of the battery may be shortened or the device in which the battery is used may be damaged by electrolyte leakage. If the batteries cannot maintain a charge for long periods of time, even when they are charged correctly, this may indicate it is time to change the battery.

12.Note:

Any other items which are not covered in this specification shall be agreed by both parties.