Ref: **PCA9046**


ALKALINE BATTERY NX-POWER PLUS
PILE ALCALINE NX-POWER PLUS

MAIN INFORMATION / **INFORMATIONS GÉNÉRALES**

SIZE	FORMAT	LR03 - AAA
BRAND	MARQUE	NX
TECHNOLOGY	TECHNOLOGIE	Alkaline / Alcaline
CHEMICAL SYSTEM	SYSTÈME CHIMIQUE	Zn/MnO2
VOLTAGE	TENSION	1.5V
CAPACITY	CAPACITÉ	1460mAh
WEIGHT	POIDS	11.5 Gr.
SHELF LIFE*	DURÉE DE VIE	5 years / 5 ans
OPERATING TEMPERATURE RANGE	TEMPÉRATURE D'UTILISATION	-18°C to +50°C
STORAGE TEMPERATURE RANGE	TEMPÉRATURE DE STOCKAGE	10°C to +25°C
TERMINALS	SORTIE	Flat / Plot pile
PACKING	CONDITIONNEMENT	Box of 10 / Boîte de 10

**In consideration of typical loss of capacity at storage. *Dans les conditions normales de stockage.*



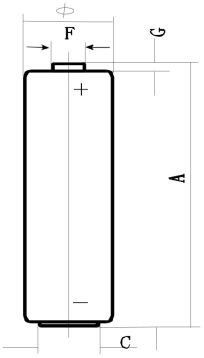

DIMENSIONS / DIMENSIONS

A	43.8 to 44.5mm
Ø	9.9 to 10.4mm
C	4.3mm
F	3.8mm
G	0.8mm

ELECTRICAL CHARACTERISTICS
CARACTÉRISTIQUES ÉLÉCTRIQUES

LOAD	24Ω	5.1Ω	100mA	75Ω	5.1Ω
TEST MODE	15s/m,8h/d	4m/h,8h/d	1h/d	4h/d	1h/d
END VOLTAGE	1.0V	0.9V	0.9V	0.9V	0.8
UNIT	h	m	m	h	m
APPLICATIONS	REMOTE CONTROL	PORTABLE LIGHTING	DIGITAL AUDIO	RADIO/ CLOCK	TOY
NORMAL DURATION	22	265	10,6	79	288

m: minute h: hour d:day

OUTLINE SAFETY WARNING: USE ONLY WITHIN THE ALLOWED PARAMETERS. Do not short circuit or over-load the battery. Charge only using an approved charger designed specifically to charge this battery. Do not heat above maximum temperatures indicated. Never crush, mutilate, puncture or abuse the battery. Do not dismantle the pack or disable any of the protective devices or circuits. DO NOT USE THE BATTERY IF YOU SUSPECT IT MAY BE FAULTY OR DAMAGED.

© Copyright Enix Energies 2005. NB: This document and the product design are the intellectual property of Enix Energies. No document or design may be copied or used for commercial purposes without written permission of Enix Energies. Users must satisfy themselves, by means of testing etc, that products are suitable for their application. Data in this document is for general guidance only; consult cell manufacturers data for definitive information. Information is given free of charge and in good faith, but no responsibility can be accepted for any errors or omission or costs or losses or liabilities arising from the use of this information. All business is conducted to Enix Energies terms and conditions only.