

MODEL TL-6937

International size reference: DD, ER32L1245



TECHNICAL DATA

(Typical values @+25°C for batteries stored for one year or less)

■ Capacity @ 60 mA, to 2V	33 Ah
■ Capacity @ 10 mA, to 2V	35 Ah
■ Rated voltage	3.9 V
■ Weight	188g (6.631 oz)
■ Volume	105 cc
■ Operating temperature range	-40°C to +85°C
■ U.L. Component Recognition, MH 12193	



Preliminary

***TADIRAN
LITHIUM
BATTERIES***

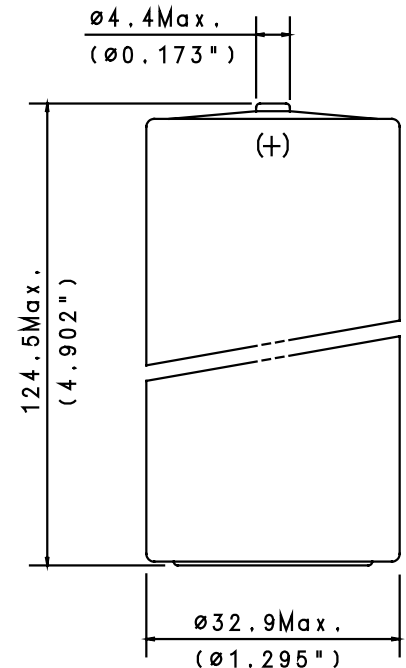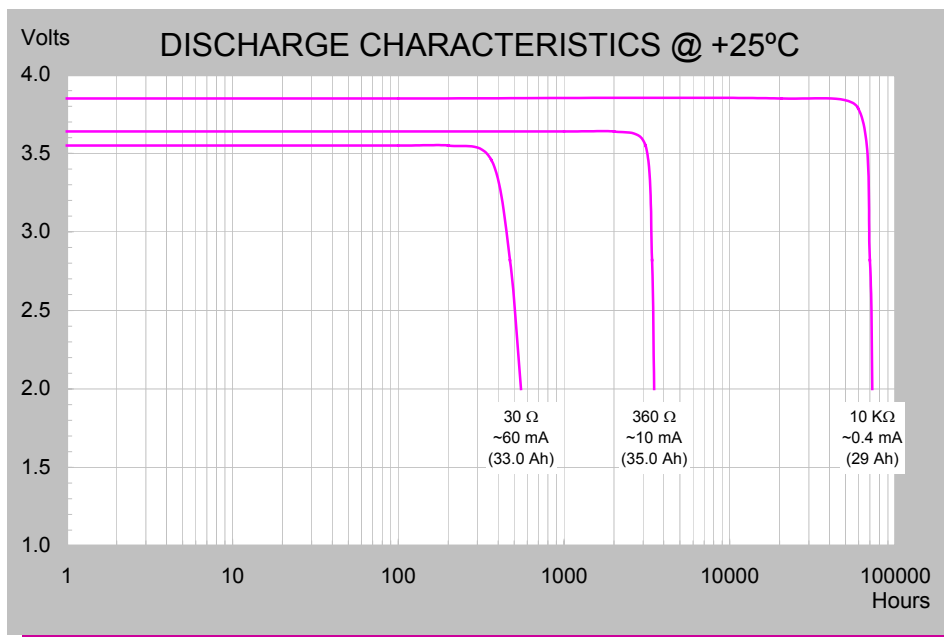

AVAILABLE TERMINATIONS

SUFFIX- /S STANDARD	15-6937-21000
SUFFIX- /T SOLDER TABS	15-6937-31000

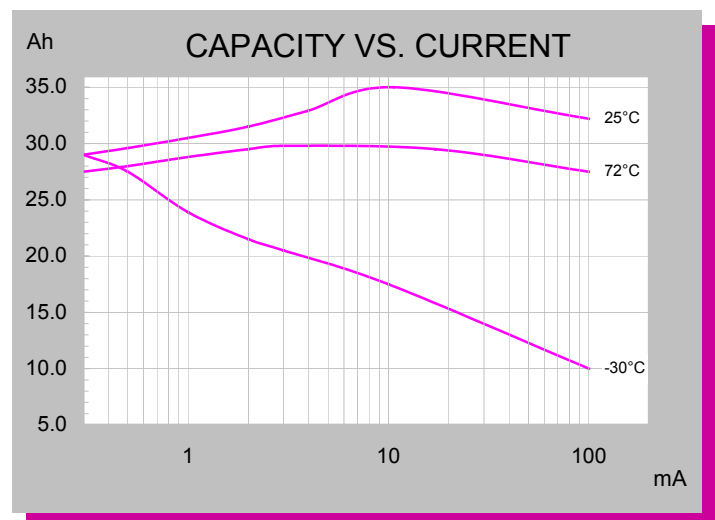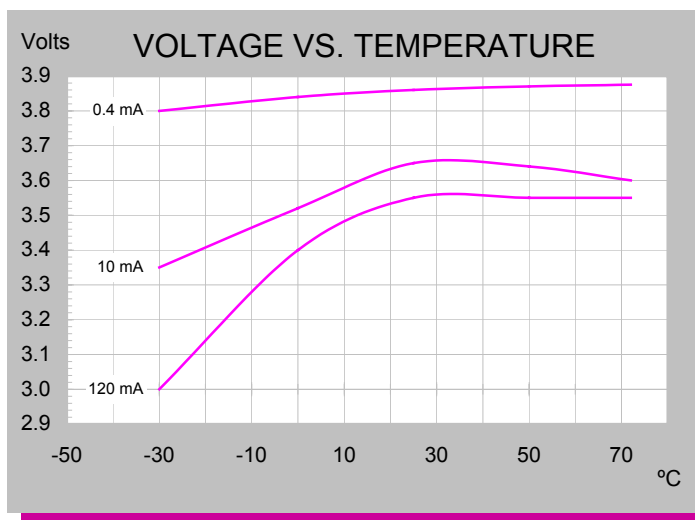

For Pulses Plus Applications Only

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.

Rev. A 07/04