


Eveready 1212



AAA


Industry Standard Dimensions

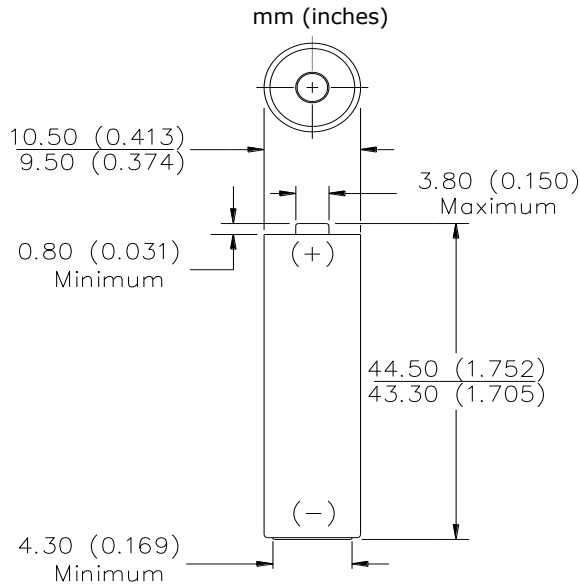





Specifications

Classification:	"Carbon Zinc" Super Heavy Duty
Chemical System:	Zinc-Manganese Dioxide (Zn/MnO_2) (No Added Mercury or Cadmium)
Designation:	ANSI-24D, IEC-R03
Nominal Voltage:	1.5 Volts
Typical Capacity:	540 mAh to 0.8 volts (Rated at 25 mA continuous at 21°C)
Operating Temp:	-18°C to 55°C (0°F to 130°F)
Typical Weight:	7.3 ± 0.1 grams (0.257 oz)
Typical Volume:	4.0 cubic centimeters (0.2 cubic inch)
Cell:	One No. 12 (size "AAA")
Jacket:	Plastic Label

Industry Standard Test (21°C)

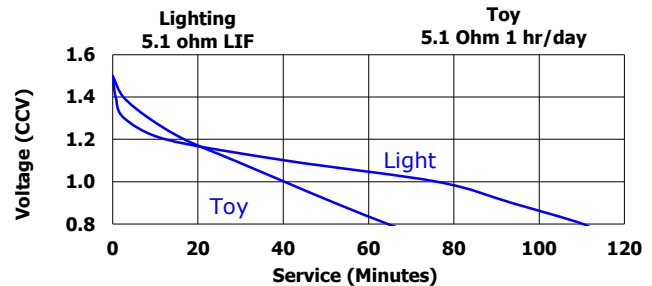

Industry Standard Tests (21°C)

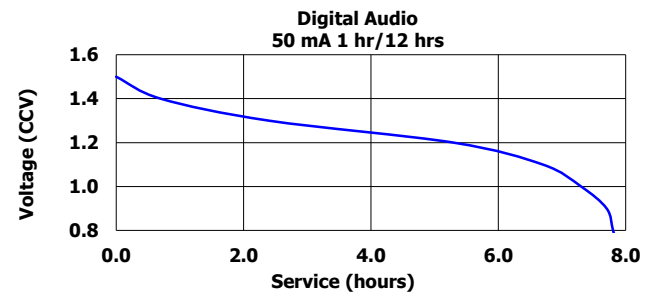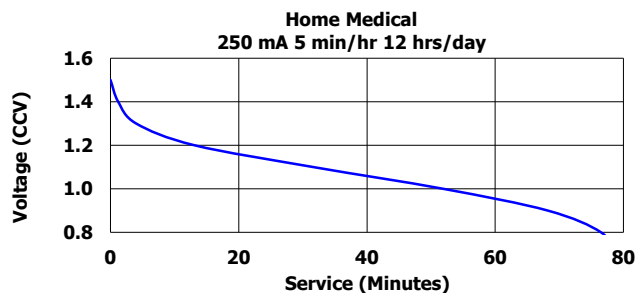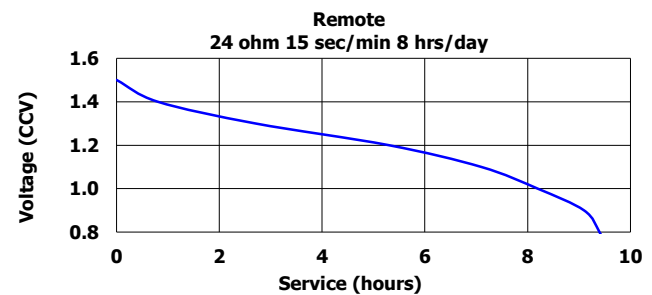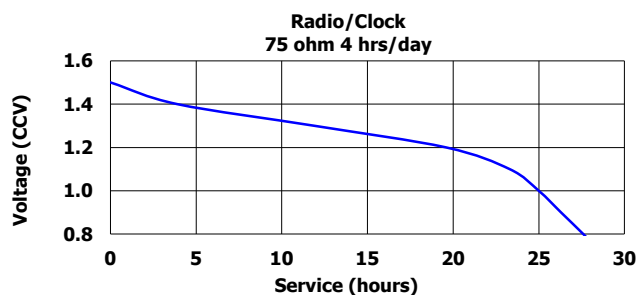

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
Contents herein do not constitute a warranty and are for reference only.