

**Specification**  
**For**  
**Lithium-ion Rechargeable Cell**

**Cell Type : ACL9087**

# Contents

1	Preface .....	1
2	Definition .....	1
2.1	Standard charge method .....	1
2.2	Standard discharge method .....	1
2.3	Nominal capacity .....	1
3	Cell model and dimensions .....	1
3.1	Description and model .....	1
3.2	Cell dimensions .....	1
4	Cell characteristics .....	2
5	Technical requirements .....	3
5.1	Cell operating conditions .....	3
5.2	Cell testing conditions .....	3
5.3	Requirement of the testing equipment .....	3
5.4	Electrochemical characteristics .....	3
5.5	Environmental and safety characteristics .....	6
6	Storage and shipment requirement .....	10
7	Restriction of hazardous substances .....	13

---

## **1 Preface**

This specification describes the type, dimension, performance, technical characteristics, warnings and cautions of the lithium ion rechargeable cell. The specification only applies to N18650CP cell.

## **2 Definition**

### **2.1 Standard charge method**

At  $25 \pm 2$  °C, the cell is charged to 4.2 V at constant current of 0.5 C (1625 mA), then charged at constant voltage of 4.2 V until the current tapers to  $\leq 0.01C$  (32 mA) followed by resting for 5min.

### **2.2 Standard discharge method**

Under  $25 \pm 2$  °C, the cell is discharged to 2.5V at a constant current of 0.2C (650 mA).

### **2.3 Nominal capacity**

Nominal capacity, signed as capacity and using mAh as unit, is obtained by discharging a cell via standard discharge method after it is standard charged.

## **3 Cell model and dimensions**

### **3.1 Description and model**

Description: Cylindrical Li-ion rechargeable cell

Model: N18650CP

### **3.2 Cell dimensions**

Cell physical dimensions listed in Figure 1 (unit: mm),  
withtube.

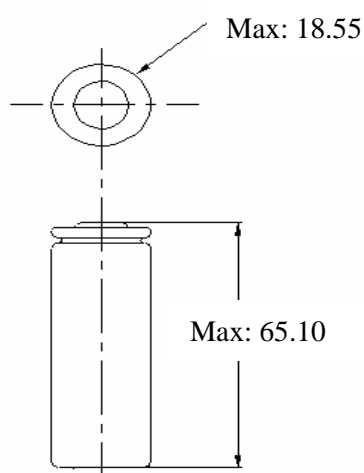


Figure 1

#### 4 Cell characteristics

Unless otherwise specified, the cell is fresh cell and tested by standard charge and standard discharge.

ITEM		SPECIFICATION
Capacity	Nominal capacity	3350mAh by standard charge and discharge
	Minimum capacity	3250mAh by standard charge and discharge
Nominal voltage		3.6 V
Charge cut-off voltage		4.20 V
Discharge cut-off voltage		2.50 V
Max charge current		1C (25°C, not for cycle life)
Max discharge current		3C (25°C, not for cycle life)
Storage temperature		1 year: -20~25 °C (1 年: -20~25 °C) 3 months: -20~45 °C (3 个月: -20~45 °C) 1 month: -20~60 °C (1 个月: -20~60 °C)
Humidity range		0 ~ 60% RH (non-condensing)

Internal resistance	$\leq 35 \text{ m}\Omega$ (AC Impedance, 1000 Hz)
Weight	$\leq 49\text{g}$

## 5 Technical requirements

### 5.1 Cell operating conditions

Charge temperature : 0 ~ 45°C

Discharge temperature : -20 ~ 60 °C

### 5.2 Cell testing conditions

Unless otherwise specified, all tests stated should be done at  $25 \pm 2^\circ\text{C}$ .

### 5.3 Requirement of the testing equipment

The voltage measurement device: not less than 0.5

The current measurement device: not less than 0.5 grade

AC Impedance: 1000 Hz

Temperature meter: precision  $\leq 0.5^\circ\text{C}$

The size measurement device:  $\pm 0.1\%$

The quality measurement device:  $\pm 0.1\%$

### 5.4 Electrochemical characteristics

Unless otherwise specified, the cell should be fresh cell and tested by standard charge and discharge .

No.	Item	Test method and conditions	Criterion												
5.4.1	Rate discharge capability	<p>(1) Charge: 0.5C constant current charge to 4.2V followed by 4.2V constant voltage charge to cut-off current <math>\leq 0.01C</math>;</p> <p>(2) Discharge: 0.2C, 0.5C, 1C, 2C, 3C constant current discharge to cut-off voltage <math>\leq 2.5</math> V.</p>	<table border="1"> <thead> <tr> <th>Current</th> <th>Relative Capacity</th> </tr> </thead> <tbody> <tr> <td>0.2C</td> <td>100%</td> </tr> <tr> <td>0.5C</td> <td><math>\geq 96\%</math></td> </tr> <tr> <td>1C</td> <td><math>\geq 93\%</math></td> </tr> <tr> <td>2C</td> <td><math>\geq 90\%</math></td> </tr> <tr> <td>3C</td> <td><math>\geq 88\%</math></td> </tr> </tbody> </table>	Current	Relative Capacity	0.2C	100%	0.5C	$\geq 96\%$	1C	$\geq 93\%$	2C	$\geq 90\%$	3C	$\geq 88\%$
Current	Relative Capacity														
0.2C	100%														
0.5C	$\geq 96\%$														
1C	$\geq 93\%$														
2C	$\geq 90\%$														
3C	$\geq 88\%$														
5.4.2	RT cycle life	<p>(1) Charge: 0.5C constant current charge to 4.2V followed by 4.2V constant voltage charge to cut-off current <math>\leq 0.01C</math> (32 mA);</p> <p>(2) Discharge: 1C constant current discharge to cut-off voltage <math>\leq 2.75V</math>.</p>	$\frac{\text{Discharge capacity of 801th cycle}}{\text{Original discharge capacity}} \geq 80\%$												
		<p>(1) Charge: 0.5C constant current charge to 4.15V followed by 4.15V constant voltage charge to cut-off current <math>\leq 0.05C</math> (162 mA);</p> <p>(2) Discharge: 1C constant current discharge to cut-off voltage <math>\leq 3.00V</math>.</p>	$\frac{\text{Discharge capacity of 1001th cycle}}{\text{Original discharge capacity}} \geq 80\%$												

5.4.3	High-low temperature discharge performance	<p>(1) Charge: 0.5C constant current charge to 4.2V followed by 4.2V constant voltage charge to cut-off current <math>\leq 0.01C</math> at <math>25 \pm 2^\circ C</math>;</p> <p>(2) Discharge: 0.2C constant current discharge to cut-off voltage <math>\leq 2.5V</math> at <math>25^\circ C</math>, <math>60^\circ C</math>, <math>45^\circ C</math>, <math>10^\circ C</math>, <math>0^\circ C</math>, <math>-10^\circ C</math>, <math>-20^\circ C</math>.</p>	<table border="1"> <thead> <tr> <th>Temperature</th> <th>Relative Capacity</th> </tr> </thead> <tbody> <tr> <td>25 °C</td> <td>100%</td> </tr> <tr> <td>60 °C</td> <td><math>\geq 95\%</math></td> </tr> <tr> <td>45 °C</td> <td><math>\geq 95\%</math></td> </tr> <tr> <td>10 °C</td> <td><math>\geq 88\%</math></td> </tr> <tr> <td>0 °C</td> <td><math>\geq 85\%</math></td> </tr> <tr> <td>-10 °C</td> <td><math>\geq 75\%</math></td> </tr> <tr> <td>-20 °C</td> <td><math>\geq 70\%</math></td> </tr> </tbody> </table>	Temperature	Relative Capacity	25 °C	100%	60 °C	$\geq 95\%$	45 °C	$\geq 95\%$	10 °C	$\geq 88\%$	0 °C	$\geq 85\%$	-10 °C	$\geq 75\%$	-20 °C	$\geq 70\%$
Temperature	Relative Capacity																		
25 °C	100%																		
60 °C	$\geq 95\%$																		
45 °C	$\geq 95\%$																		
10 °C	$\geq 88\%$																		
0 °C	$\geq 85\%$																		
-10 °C	$\geq 75\%$																		
-20 °C	$\geq 70\%$																		
5.4.4	Storage performance at $25^\circ C$ (100% SOC)	<p>(1) Charge: 0.5C constant current charge to 4.2V followed by 4.2V constant voltage charge to cut-off current <math>\leq 0.01C</math>; Discharge: 0.2C constant current discharge to cut-off voltage <math>\leq 2.5V</math>, to obtain the initial capacity;</p> <p>(2) Charge: 0.5C constant current charge to 4.2V followed by 4.2V constant voltage charge to cut-off current <math>\leq 0.01C</math>;</p> <p>(3) Stored at <math>25 \pm 2^\circ C</math> for 28 days;</p> <p>(4) Discharge: 0.2C constant current discharge to cut-off voltage <math>\leq 2.5V</math>, to obtain the residual capacity;</p> <p>(5) Charge: 0.5C constant current charge to 4.2V followed by 4.2V constant voltage charge to cut-off current <math>\leq 0.01C</math>; Discharge: 0.2C constant current discharge to cut-off voltage <math>\leq 2.5V</math>, to obtain the recovery capacity.</p>	<table border="1"> <thead> <tr> <th>Capacity</th> <th>Relative Capacity</th> </tr> </thead> <tbody> <tr> <td>Residual capacity</td> <td><math>\geq 90\%</math></td> </tr> <tr> <td>Recovery capacity</td> <td><math>\geq 95\%</math></td> </tr> <tr> <td>Initial capacity</td> <td>100%</td> </tr> </tbody> </table>	Capacity	Relative Capacity	Residual capacity	$\geq 90\%$	Recovery capacity	$\geq 95\%$	Initial capacity	100%								
Capacity	Relative Capacity																		
Residual capacity	$\geq 90\%$																		
Recovery capacity	$\geq 95\%$																		
Initial capacity	100%																		

5.4.5	Storage performance at 60°C (100% SOC)	<p>(1) Charge: 0.5C constant current charge to 4.2V followed by 4.2V constant voltage charge to cut-off current <math>\leq 0.01C</math> at <math>25\pm 2^\circ C</math>; Discharge: 0.2C constant current discharge to cut-off voltage <math>\leq 2.5V</math> at <math>25\pm 2^\circ C</math>, to obtain the initial capacity;</p> <p>(2) Charge: 0.5C constant current charge to 4.2V followed by 4.2V constant voltage charge to cut-off current <math>\leq 0.01C</math> at <math>25\pm 2^\circ C</math>;</p> <p>(3) Stored at <math>60 \pm 2^\circ C</math> for 28 days;</p> <p>(4) Kept at <math>25 \pm 2^\circ C</math> for 5 hours;</p> <p>(5) Discharge: 0.2C constant current discharge to cut-off voltage <math>\leq 2.5V</math> at <math>25\pm 2^\circ C</math>, to obtain the residual capacity;</p> <p>(6) Charge: 0.5C constant current charge to 4.2V followed by 4.2V constant voltage charge to cut-off current <math>\leq 0.01C</math> at <math>25\pm 2^\circ C</math>; Discharge: 0.2C constant current discharge to cut-off voltage <math>\leq 2.5 V</math> at <math>25\pm 2^\circ C</math>, to obtain the recovery capacity.</p>	<table border="1"> <thead> <tr> <th>Capacity</th> <th>Relative Capacity</th> </tr> </thead> <tbody> <tr> <td>Residual capacity</td> <td><math>\geq 85\%</math></td> </tr> <tr> <td>Recovery capacity</td> <td><math>\geq 90\%</math></td> </tr> <tr> <td>Initial capacity</td> <td>100%</td> </tr> </tbody> </table>	Capacity	Relative Capacity	Residual capacity	$\geq 85\%$	Recovery capacity	$\geq 90\%$	Initial capacity	100%
Capacity	Relative Capacity										
Residual capacity	$\geq 85\%$										
Recovery capacity	$\geq 90\%$										
Initial capacity	100%										

## 5.5 Environmental and safety characteristics

NO.	ITEM	CRITERION	TESTING METHOD	STANDARD
5.5.1	Vibration	No fire, No explosion, No leakage, The maximum mass loss $\leq 0.1\%$	After standard fully charge, cell shall be attached to a vibration table directly and subjected to vibration that consists of 10 Hz to 55 Hz to 10 Hz at the speed of 1Hz/min in 90~100mins.The total excursion of the vibration is 0.8mm (0.060 inches). The cell shall be vibrated in each direction along axis of the cylinder and the vertical directions of axis of the cylinder.	UL1642
5.5.2	Drop test	No fire, No explode	The cell is charged following the standard charge method; The cells is dropped three times from a height of 1.0 m onto a concrete floor, to obtain impacts in random orientations, at $25^{\circ}\text{C} \pm 2^{\circ}\text{C}$ ; Observation of 1 h.	IEC62133
5.5.3	Overcharge test	No fire, No explode	The cell is discharged following the standard discharge method. Apply a 8.4V power supply and a 2C charge current for 24hrs.	UN38.3
5.5.4	Forced Discharge test	No fire, No explode	Cell shall first be discharged according to standard discharge method, then the cell is subjected to a reverse charge at 1C for 90 min at $25 \pm 2^{\circ}\text{C}$	IEC62133
5.5.5	130°C hot oven test 130°C	No fire, No explode	The cell is charged following the standard charge method. After charging the cell is put in the oven. And then the oven temperature will be ramped at 5°C per minute to 130 °C and held at 130 °C . When the temperature of the cell reach 130 °C , the cell is maintained in the 130°C oven for a maximum of 30 minute or until a fire or explosion is obtained, whichever comes first.	GB31241

5.5.6	Crush test	No fire, No explode	After charging a cell following the standard charge method, the cell shall be crushed between two flat surfaces. The direction of the crushing force shall be vertical to axis of the cylinder. The crushing force is to be applied by a hydraulic ram with a 32mm diameter piston. Crushing force is approximately 13 KN. Once the maximum pressure has been obtained it is to be released.	UL1642
5.5.7	Short circuit test at room temperature	No fire, No explode	Cell shall first be charged according to standard charge method, and then cell is to be short-circuited by connecting the positive and negative terminals of the cell with copper wire having a maximum resistance load of $80 \pm 20\text{m}\Omega$ . This test is done at room temperature. Monitor the cell temperature while testing. The cell is continuously discharged until the cell case temperature has returned to be $10^\circ\text{C}$ less than peak temperature.	UL1642
5.5.8	Short circuit test at $55^\circ\text{C}$	No fire, No explode	Cell shall first be charged according to standard charge method, and then cell is to be short-circuited by connecting the positive and negative terminals of the cell with copper wire having a maximum resistance load of $80 \pm 20\text{m}\Omega$ . This test is done at $55 \pm 5^\circ\text{C}$ . Monitor the cell temperature while testing. The cell is continuously discharged until the cell case temperature has returned to be $10^\circ\text{C}$ less than peak temperature.	UL1642

5.5.9	Low Pressure test	No fire, No explosion, No leakage, The maximum mass loss $\leq 0.1\%$	Cell shall first be charged according to standard charge method, and then cell is to be stored at an absolute pressure of 11.6 kPa for six hours at ambient temperature.	UL1642
Note	All above safety tests will be conducted at $25^{\circ}\text{C} \pm 2^{\circ}\text{C}$ except where specified differently. Use proper ventilation with protective equipment.			

We will not be responsible for the trouble caused by handling in violation of cautions in instructions.

We will not be responsible for the trouble caused by matching electric circuit, cell pack and charger.

We will not be responsible for any defect of cells caused during assembling after acceptance.

## 6 Storage and shipment requirement

<b>Item</b>	<b>Conditions</b>	<b>Permissible time</b>
Storage environment	-20°C ~ 60°C, 60% RH Max	Less than 1 month
	-20°C ~ 45°C, 60% RH Max	Less than 3 months
	-20°C ~ 25°C, 60% RH Max	Less than 1 year
<p>About long time storage:            If the cell needs to be stored for a long time, the cell's storage voltage should be 3.5 ~ 3.8 V. Also, it is recommended to charge the cell every six months.</p>		

precautions: (It should be indicated especially in manual or instruction for users.)

1	Do not use and leave the cell near a heat source such as fire or heater.
2	Do not use or leave the cell under the blazing sun (or in heated car by sunshine).
3	Do not use or leave the cell at very high temperature conditions (e.g., strong direct sunlight or a vehicle in extremely hot conditions). Otherwise, it can overheat or catch fire or its performance will be degenerate and its service life will be decreased.
4	Do not short circuit, over-charge or over-discharge the cell.
5	Don't immerse the cell in water and seawater. Please put it in cool and dry environment if no using.
6	Don't reverse the positive and negative terminals
7	Do not disassemble or modify the cell.
8	Do not transport or store the cell together with metal objects such as necklaces, hairpins, coins, etc.
9	Make sure the cell is not with conspicuous damage or deformation.
10	Don't connect the cell to an electrical outlet directly.
11	If the cell leaks and the electrolyte splashes into the eyes, rinse the eyes with clean running water immediately for at least 15 minutes, and go to hospital for treatment if necessary.
12	Mixed use of cells of different types is not allowed.
13	Keep the cell away from babies.

14	Do not directly solder the cell and pierce the cell with a nail or other sharp object
15	Do not strike, throw or trample the cell.
16	Use the cell charger specifically for that purpose when charging.
17	Please separate cells of different electrochemical systems from one another when disposing of secondary cells.
18	Clean the terminals with a dry cloth before use if the cell terminals are dirty. Otherwise power failure or charge failure may occur due to the poor connection with the instrument.
19	Cells should be removed from the device or charger immediately and not used again if they are over heat, give off odor, discolor or deform, or appear abnormally in any way during use, charging and storage.
20	The cell replacement shall be done only by either cell supplier or device supplier instead of the user.
21	Please tape the terminals to insulate cells before discarding them in case of fire and explosion.
22	Do not use cells in strong electrostatic and magnetic occasions, otherwise, it can cause safety problems easily.
23	Use of damaged cells is not permitted.
24	Make sure package designing will not cause cell damages.
25	Cell packing should be conducted strictly according to level range, any misuse of different levels should not be permitted.
26	Disassembling cells from pack or module is not permitted unless under the guidance of professional technicians.

<b>Version</b>	A/01	<b>Page</b>	13/13
----------------	------	-------------	-------

---

## **7 Restriction of hazardous substances**

This model of lithium-ion cell is in accordance with our company's request of "The hazardous substances and material management standard" or customer's requirements.